

HF681N

GUIDE

Wuhan Guide Technology Co., Ltd.

027-87920068
027-87927299
www.gdetec.com


400-0077-570

6



2025.07

©
Copyright©Wuhan Guide Technology Co., Ltd.

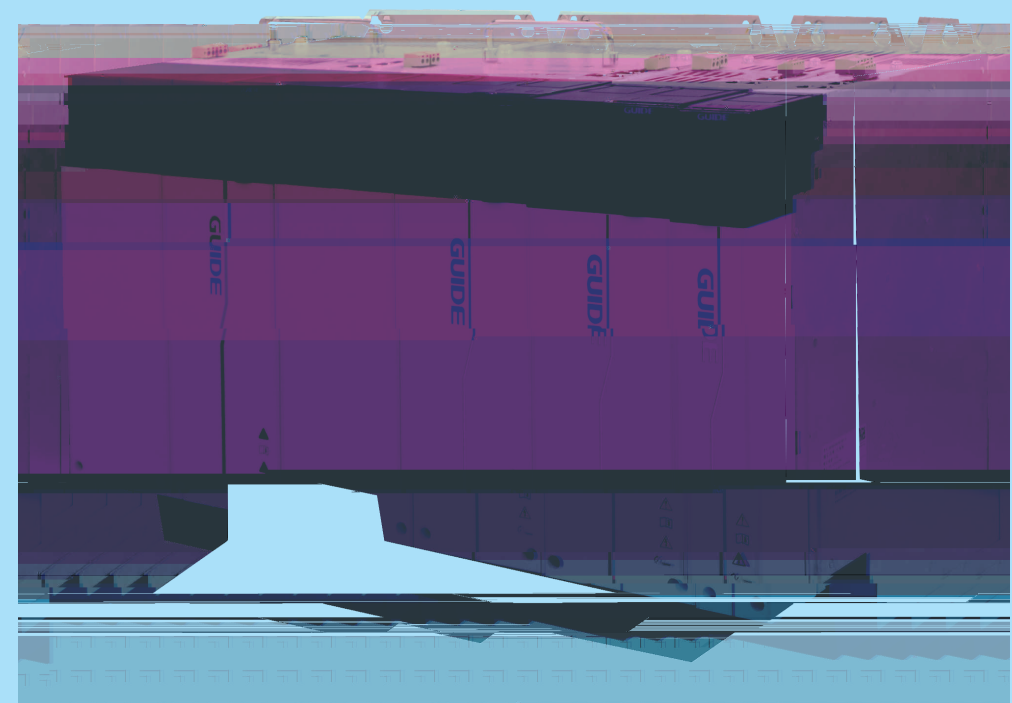


HF681N




HF681N




外观				
	逆变单元			
功率等级	. 5~7. 5kW	~37kW	45~75kW	90~ 0kW
尺寸 (WxDxH) mm	50x34 0x4 00	100x34 0x4 00	200x34 0x4 00	300x34 0x4 00




20%

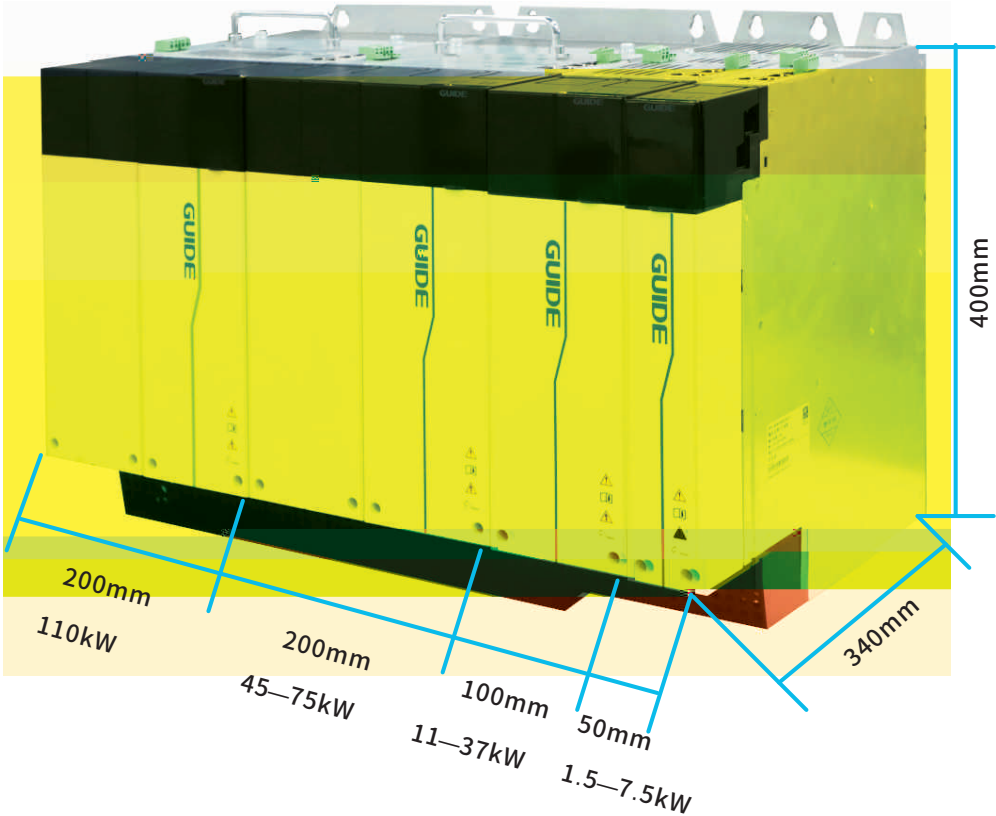






•

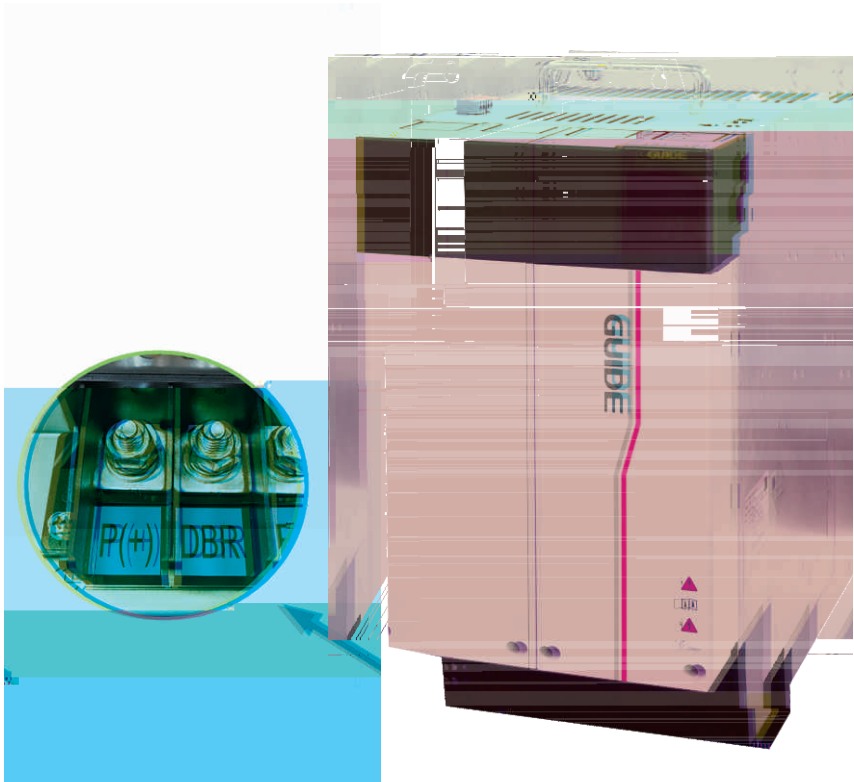



• 75kW

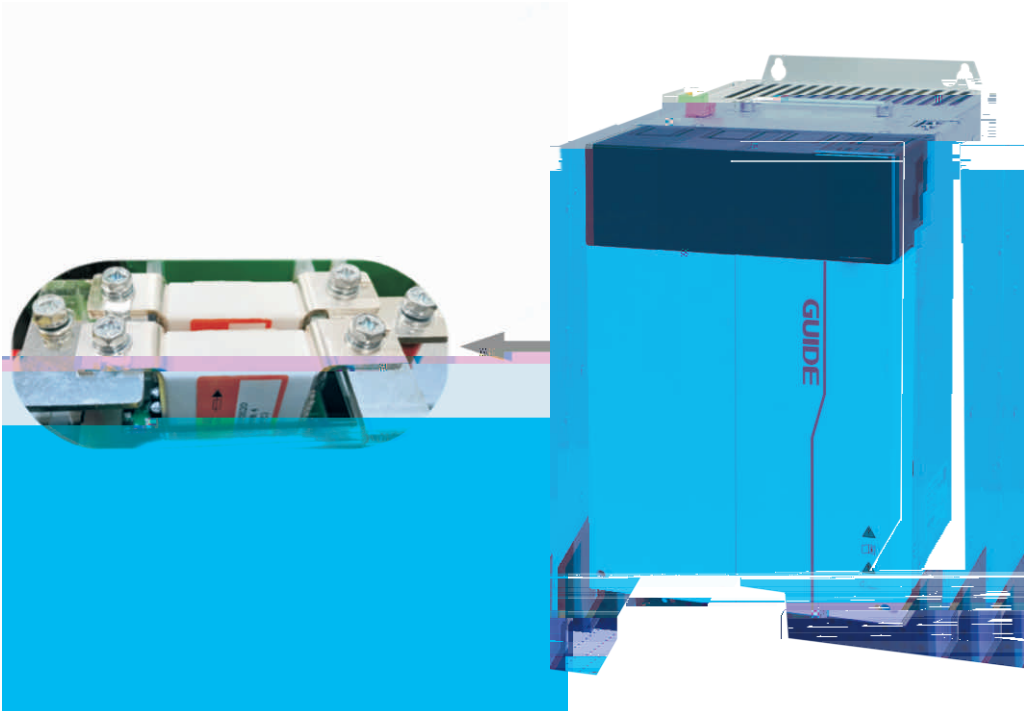


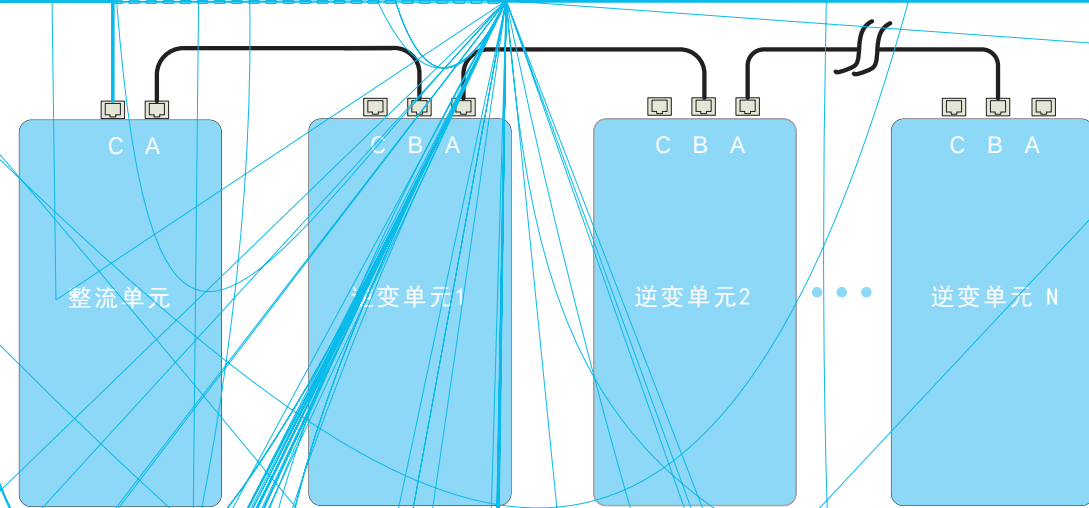




	PID	
		PID / /
		43 DI 8 DI 2 AI 2 STO
		30 DO 5 DO 2 AO
	LED	ə - ʒ ɹ ʁ ə -
		1000 1000 100 1% 3000
		- 10 +40 40 1 1% 50 - 10
		95%RH
		- 20 +60 10- 30
		98% 3/4t O ɥ ɹ 2 ɹ ɔ IO ʁ 2 ɔ ɹ ɥ ɹ

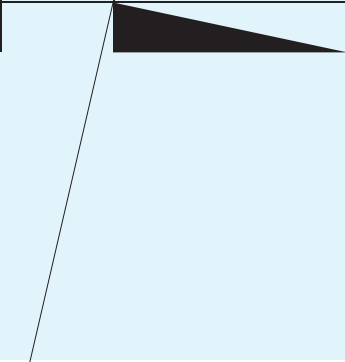

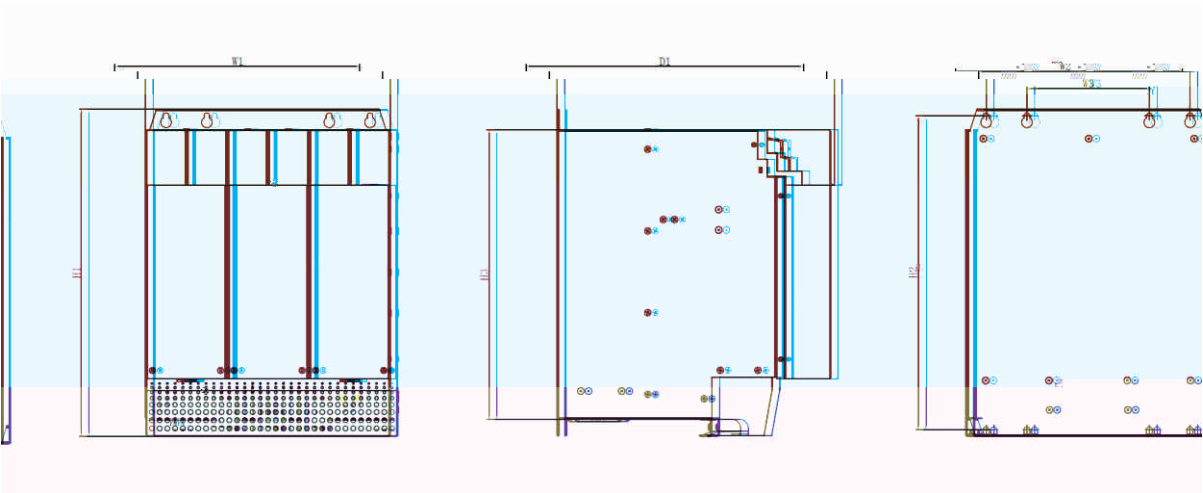


	(mm)				(mm)			(mm)
	H1	H3	W1	D1	H2	W2	W3	
HF681N01M-160-4	400	355	300	340	384	250	150	7

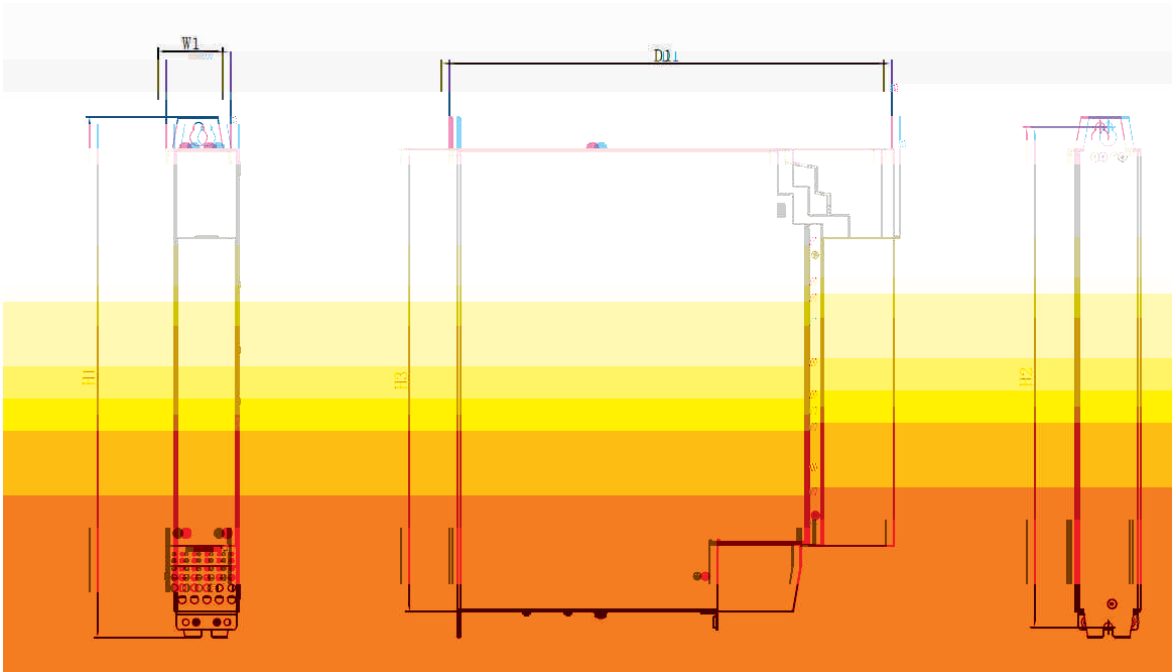

	(mm)				(mm)			(mm)
	H1	H3	W1	D1	H2	/	/	




HF681N03M-1R5- 4	400	355	50	340	384			
------------------	-----	-----	----	-----	-----	--	--	--

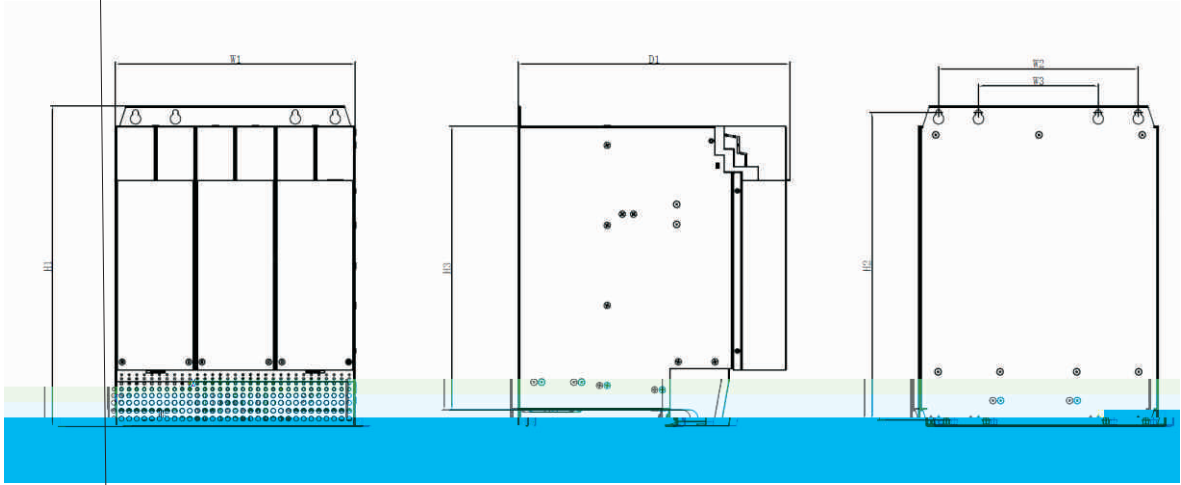


	(mm)				(mm)			(mm)
	H 1	H 3	W 1	D 1	H 2	W 2	W 3	
HF681N03M-090- 4	400	355	300	340	384	250	150	7
HF681N03M-110- 4	400	355	300	340	384	250	150	7

三相电源
380V 400V
50/60Hz

HF681N系列产品安装方式

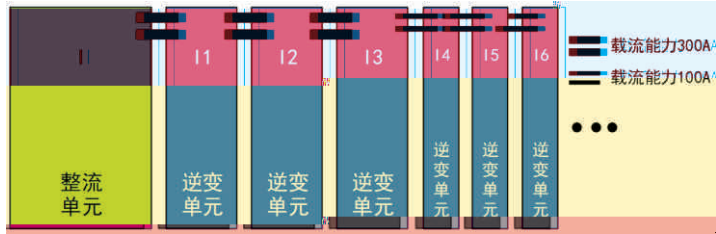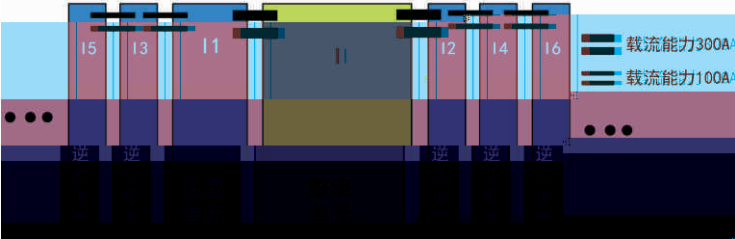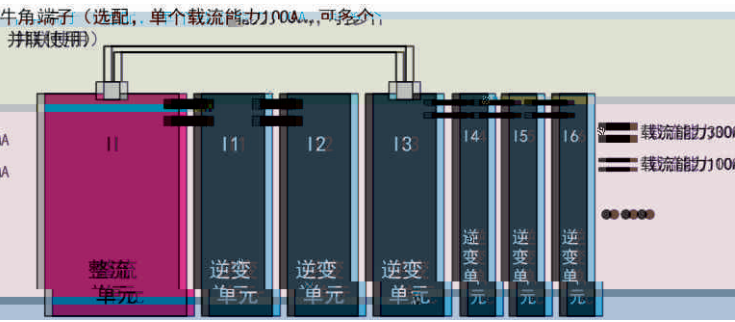		$I \geq 0.8 * (I1+I2+I3+I4+I5+I6+...)$ $I1+I2+I3+I4+I5+I6+... \leq 300A$ $I4+I5+I6+... \leq 100A$
居中		$I \geq 0.8 * (I1+I2+I3+I4+I5+I6+...)$ $I2+I4+I6+... \leq 300A$ $I1+I3+I5+... \leq 300A$ $I4+I6+... \leq 100A$ $I3+I5+... \leq 100A$
		$I \geq 0.8 * (I1+I2+I3+I4+I5+I6+...)$ $I3+I4+I5+I6+... \leq 100*n) A$ (n $I1+I2 \leq 300A$ $I4+I5+I6+... \leq 100A$

HF681N系列产品安装方式

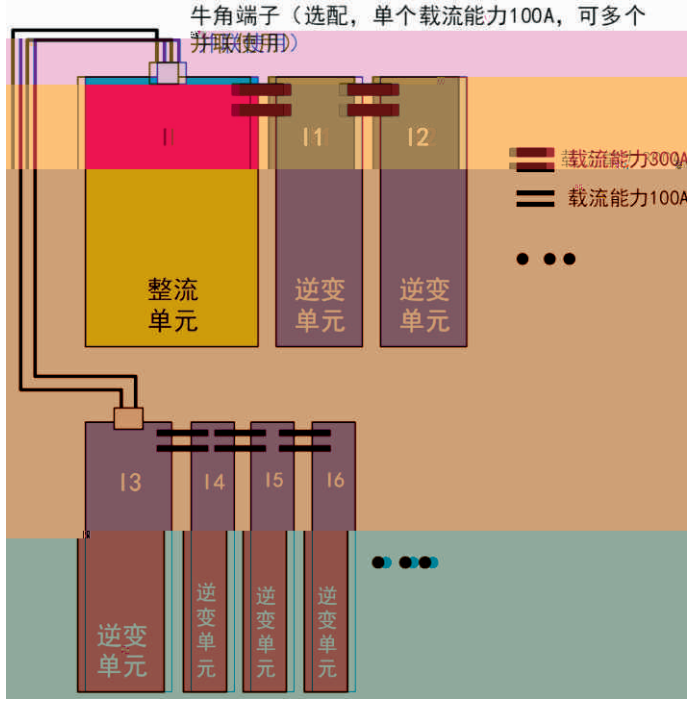		$I \geq 0.8 * (I1+I2+I3+I4+I5+I6+...)$ $I3+I4+I5+I6+... \leq 100*n) A$ (n $I1+I2 \leq 300A$ $I4+I5+I6+... \leq 100A$
--	--	--